




KEMTRON KTL 48 Series

Shaker Screen Replacement

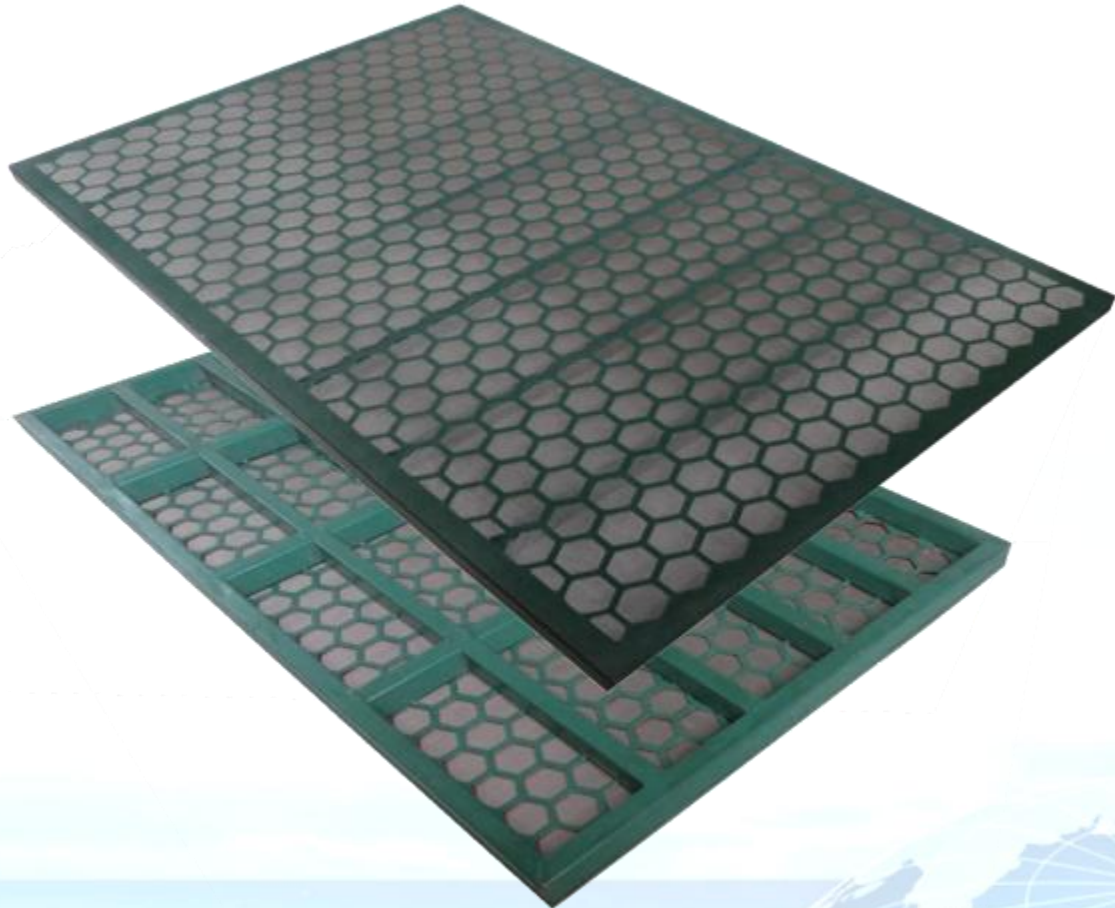


Compatible shale shakers


- KEMTRON KTL 48 shale shaker.
- KTL-448 AG four panel shaker.
- KTL-48 STD three panel shaker.
- KTL-48D three panel shaker.
- KTL-48 SS three panel shaker.
- KEMTRON 48 series desander.
- KEMTRON 48 series desilter.

Technical Parameter

- **Model No.:** TP-KTL-48.
- **Material:** stainless steel 304/316/316 L.
- **Frame Material:** Q235 steel.
- **Standard:** API RP 13C.
- **API RP 13C Designation:** API 20 – API 230.
- **Series:** XL, XR.
- **Warranty Period:** 1 year.
- **Working Life:** 400 –450 hours.

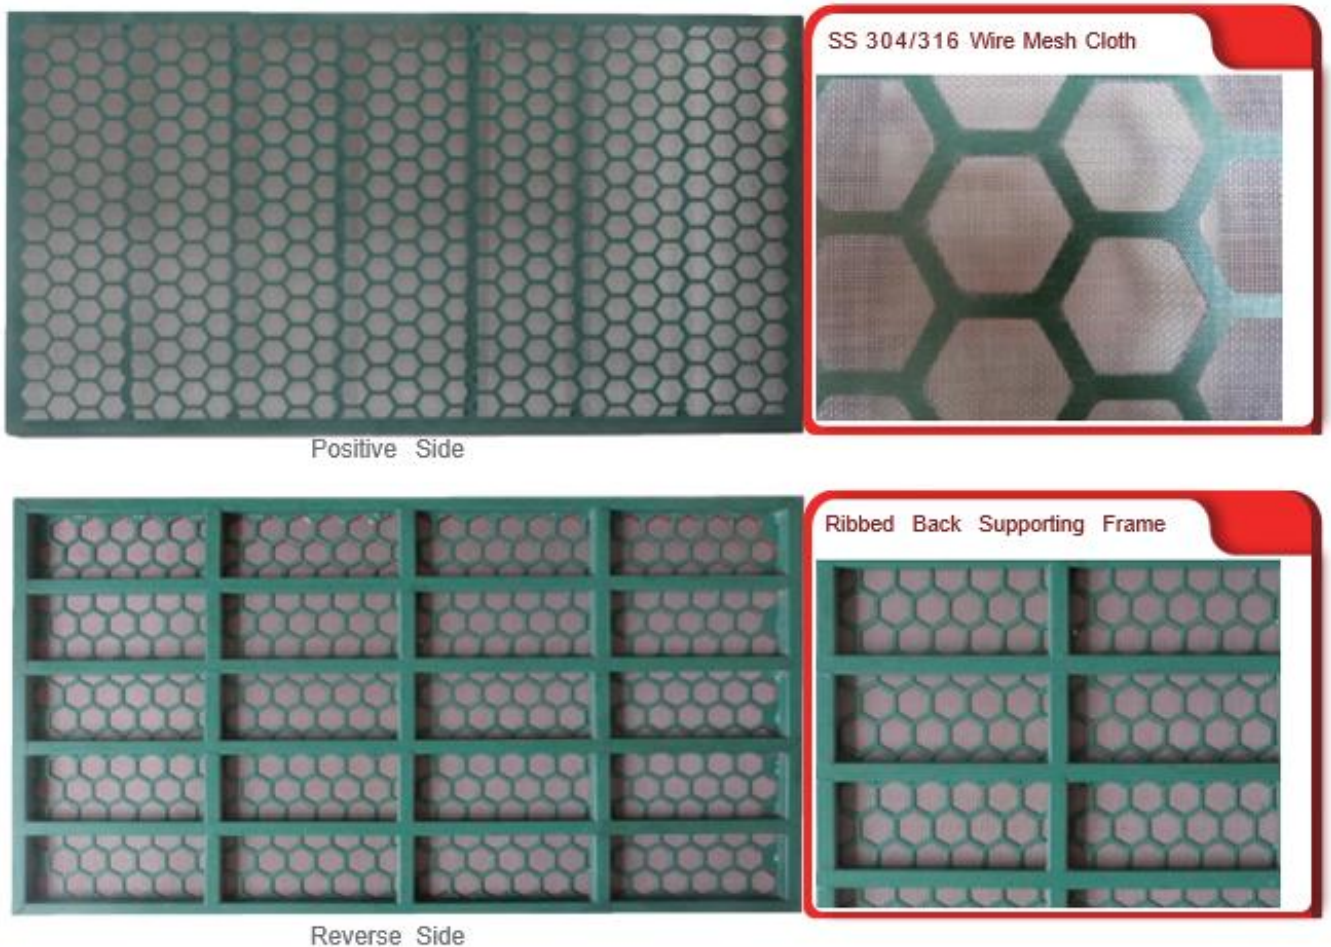

TP-KTL-48-A325

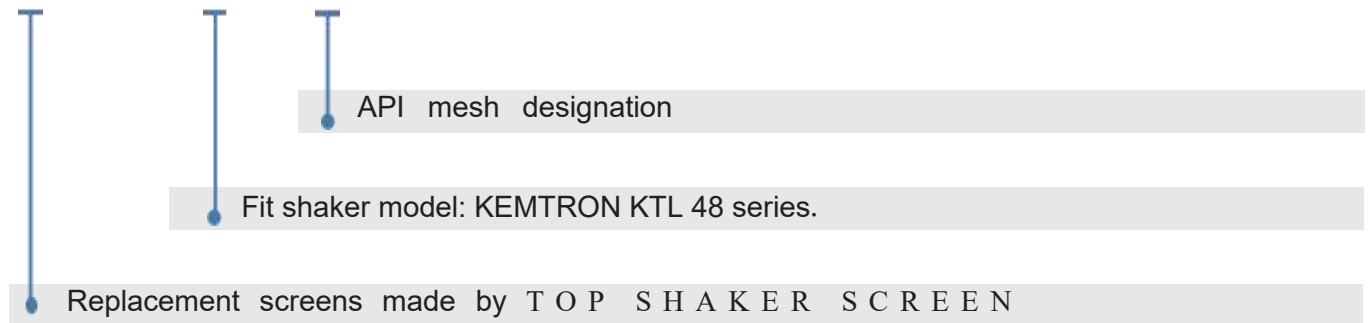

Performance Parameter

Screen Designation	API RP 13C Designation	Conductance Number	D100 Separation (microns)	Non-Blank Area (sq.ft)
TP-KLT-48-A400	API 400	0.25	36.0	5.24
TP-KLT-48-A325	API 325	0.38	48.8	5.24
TP-KLT-48-A270	API 270	0.39	53.8	5.24
TPKLT-48-A230	API 230	0.57	68.6	5.24
TP-KLT-48-A200	API 200	0.62	73.3	5.24
TP-KLT-48-A170	API 170	0.76	85.6	5.24
TP-KLT-48-A140	API 140	1.01	99.2	5.24
TP-KLT-48-A120	API 120	1.48	120.1	5.24
TP-KLT-48-A100	API 100	2.06	142.5	5.24
TP-KLT-48-A80	API 80	1.77	176.1	5.24
TP-KLT-48-A70	API 70	2.06	207.8	5.24
TP-KLT-48-A60	API 60	2.69	260.3	5.24
TP-KLT-48-A45	API 45	6.72	377.2	5.24
TP-KLT-48-A35	API 35	7.96	517.8	5.24
TP-KLT-48-A25	API 25	8.20	749.7	5.24
TP-KLT-48-A20	API 20	9.01	862.2	5.24

* D100: Particles this size and larger will normally be discarded.

* API: Corresponding API sieve equivalent as per API RP 13C.

* Conductance No.: This represents the ease with which a liquid can flow through the screen. Larger values represent higher volume handling.