


Brandt BLT-50/LCM-2D

Shaker Screen Replacement ▼

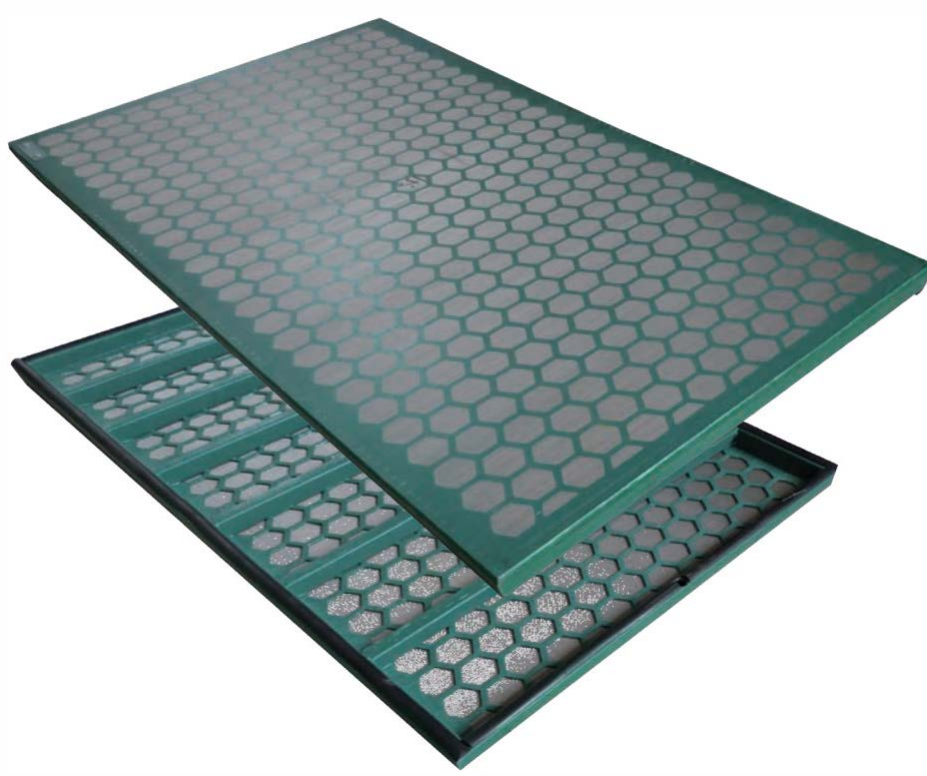

Compatible shale shakers


- Brandt BLT-50/LCM-2D shale shaker.

<https://www.topshakerscreen.com/>
Email: postmaster@topshakerscreen.com

REPLACEMENT SHALE SHAKER SCREENS 01

Technical Parameter

- **Model No.:** TP-LCM-2D
- **Material:** stainless steel 304/316/316 L.
- **Body Material:** Q235 steel.
- **Standard:** API RP 13C.
- **API RP 13C Designation:** API 60 - API 325.
- **Series:** XR, XL optional.
- **Warranty Period:** 1 year.
- **Working Life:** 400-450 hours.

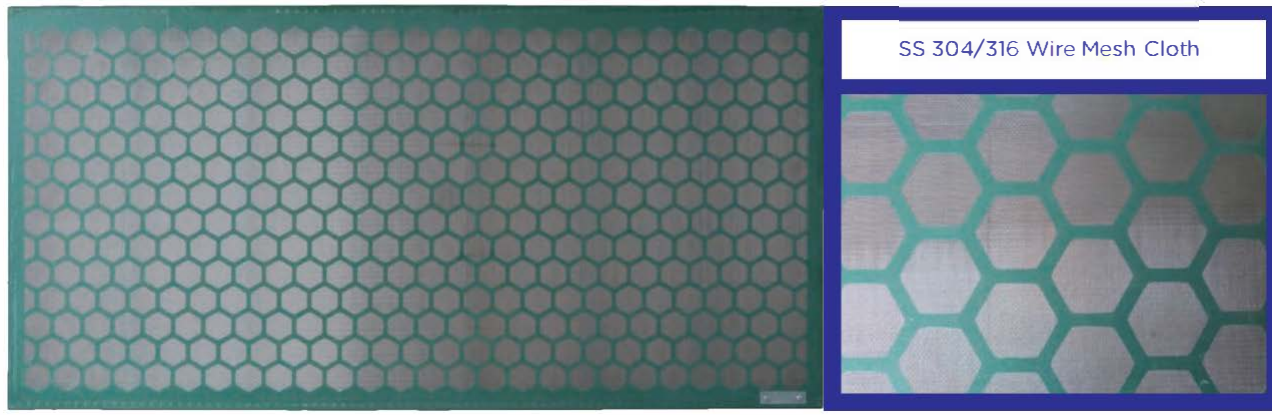

Positive Side




Reverse Side

<https://www.topshakerscreen.com/>
Email: postmaster@topshakerscreen.com

REPLACEMENT SHALE SHAKER SCREENS 02

TP-LCM-2D-A325

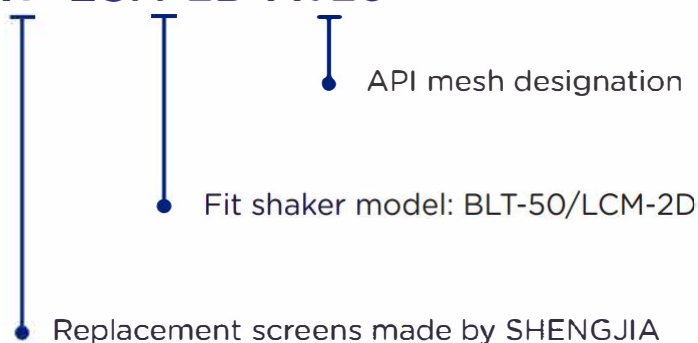

Performance Parameter

Screen Designation	Mesh Type	API RP 13C Designation	Conductance Number	D100 Separation (microns)	Layer No.	Non-Blank Area (sq.ft)
tp-LCM-2D-A325	XR/XL	API 325	0.37	44	2/3	8.6
tp-LCM-2D-A200	XR/XL	API 200	0.54	72	2/3	8.6
tp-LCM-2D-A170	XR/XL	API 170	0.7	98	2/3	8.6
tp-LCM-2D-A140	XR/XL	API 140	1.14	104	2/3	8.6
tp-LCM-2D-A120	XR/XL	API 120	1.55	119	2/3	8.6
tp-LCM-2D-A100	XR/XL	API 100	2.04	147	2/3	8.6
tp-LCM-2D-A80	XR/XL	API 80	2.33	195	2/3	8.6
tp-LCM-2D-A70	XR/XL	API 70	2.85	223	2/3	8.6
tp-LCM-2D-A60	XR/XL	API 60	3.09	275	2/3	8.6

* D100: Particles this size and larger will normally be discarded.

* API: Corresponding API sieve equivalent as per API RP 13C.

* Conductance No.: This represents the ease with which a liquid can flow through the screen. Larger values represent higher volume handling.

DECLARATION

topshakerscreensolemnly declares that we only produce the replacement screens but not original ones.

■ Brandt, BLT-50, LCM-2D are marks of Varco I/P, Inc.

* All listed items are right fit replacement shaker screen not originally made by NOV Brandt.

* All concerned marks are reserved by the original manufacturer and company.

<https://www.topshakerscreen.com/>
Email: postmaster@topshakerscreen.com

REPLACEMENT SHALE SHAKER SCREENS 03